

## Series 4600 Horizontal Split Case Pump

# 6 x 5 x 15H

## SUBMITTAL

JOB: \_\_\_\_\_ REPRESENTATIVE: \_\_\_\_\_

ENGINEER: \_\_\_\_\_ ORDER NO: \_\_\_\_\_ DATE: \_\_\_\_\_

CONTRACTOR: \_\_\_\_\_ SUBMITTED BY: \_\_\_\_\_ DATE: \_\_\_\_\_

APPROVED BY: \_\_\_\_\_ DATE: \_\_\_\_\_


PUMP DESIGN DATA			
NO. OF PUMPS:		TAG:	
CAPACITY:	USgpm (L/s)	HEAD:	ft (m)
LIQUID:		VISCOSITY:	
TEMPERATURE:	°F (°C)	SPECIFIC GRAVITY:	

MOTOR DESIGN DATA		
HP:		RPM:
FRAME SIZE:		ENCLOSURE:
VOLTS:	HERTZ: 50 Hz	PHASE:
EFFICIENCY: <input type="checkbox"/> Energy Efficient <input type="checkbox"/> NEMA Premium <input type="checkbox"/> Other _____		

MATERIALS OF CONSTRUCTION		
FLANGE RATING	<input type="checkbox"/> ANSI 125	<input type="checkbox"/> ANSI 250
CONSTRUCTION	<input type="checkbox"/> BRONZE ITTED <input type="checkbox"/> ALL IRON	<input type="checkbox"/> BRONZE ITTED <input type="checkbox"/> ALL IRON
CASING	CAST IRON	
IMPELLER	BRONZE	CAST IRON
FLUSH LINE	COPPER	STEEL
WEAR RINGS	BRONZE	CAST IRON
SHAFT	CARBON STEEL	
SHAFT SLEEVE	BRONZE	
GASKET	VELOTHERM (FIBER)	
MAX. PUMP OPERATING CONDITIONS	175 psi at 140°F (12 bars at 60°C)	300 psi at 150°F (21 bars at 66°C)
	140 psi at 250°F (10 bars at 121°C)	250 psi at 250°F (17 bars at 121°C)

MECHANICAL SEAL DESIGN DATA		
PUMP FLANGE RATING	<input type="checkbox"/> ANSI 125	<input type="checkbox"/> ANSI 250
SEAL TYPE	A21	ARO
STATIONARY SEAT	SILICON CARBIDE	CARBON
ROTATING FACE	CARBON	DURCHROME
SECONDARY SEAL	EPDM	VITON
SPRING	STAINLESS STEEL	
ROTATING HARDWARE	STAINLESS STEEL	
GLAND PLATE	BRONZE	

OPTIONAL EQUIPMENT

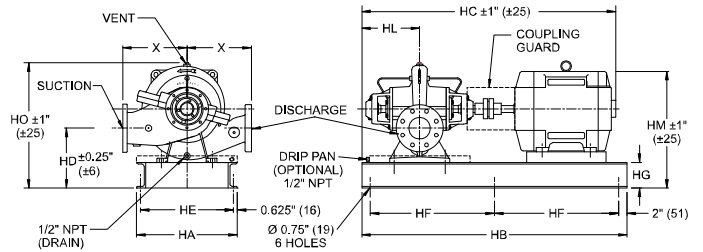

### IMPORTANT (PLEASE SELECT)

SUCTION SIDE REQUIREMENT
(Viewed from motor end)
<input type="checkbox"/> RIGHT HAND (ILLUSTRATED)
<input type="checkbox"/> LEFT HAND

- TOLERANCE OF ±0.125" (±3 mm) SHOULD BE USED
- FOR EXACT INSTALLATION DATA PLEASE WRITE FACTORY FOR CERTIFIED DIMENSIONS


FLANGE RATINGS	
SUCTION	DISCHARGE
<input type="checkbox"/> 125 psi	125 psi
<input type="checkbox"/> 125 psi	250 psi
<input type="checkbox"/> 250 psi	250 psi

MOTOR FRAME	hp @ rpm	DIMENSIONS inches (mm)											WEIGHT lbs. (kg)			
	1500 ODP/TEFC	HA	HB	HC (max)	HD	HE	HF	HG	HL	HM	HO	X	ODP	TEFC		
286T	30	16.00 (406)	58.00 (1473)	59.06 (1500)	11.00 (279)	14.75 (375)	27.00 (686)	3.00 (76)	13.50 (343)	22.38 (568)	26.00 (660)	15.00 (381)	975 (443.2)	1015 (461.4)		
324T	40	19.00 (483)		59.44 (1510)	12.00 (305)	17.75 (451)		30.00 (762)		4.00 (102)	24.44 (621)		25.25 (641)	27.00 (686)	1130 (506.8)	1305 (586.4)
326T	50			62.44 (1586)							1160 (520.5)				1390 (615.9)	
364T	60		64.00 (1626)	63.13 (1604)			1325 (595.5)		1505 (668.2)							
365T	75	64.13 (1629)		1350 (609.1)	1625 (727.3)											
404T	100/-	67.50 (1715)		1500 (677.3)	—											
405T	-/100	69.00 (1753)		—	1950 (872.7)											




## PERFORMANCE CURVES

Performance Guaranteed Only At Operating Point Indicated  
 CURVE SHOWN FOR CLEAR, COLD WATER - SP. GR. 1.0

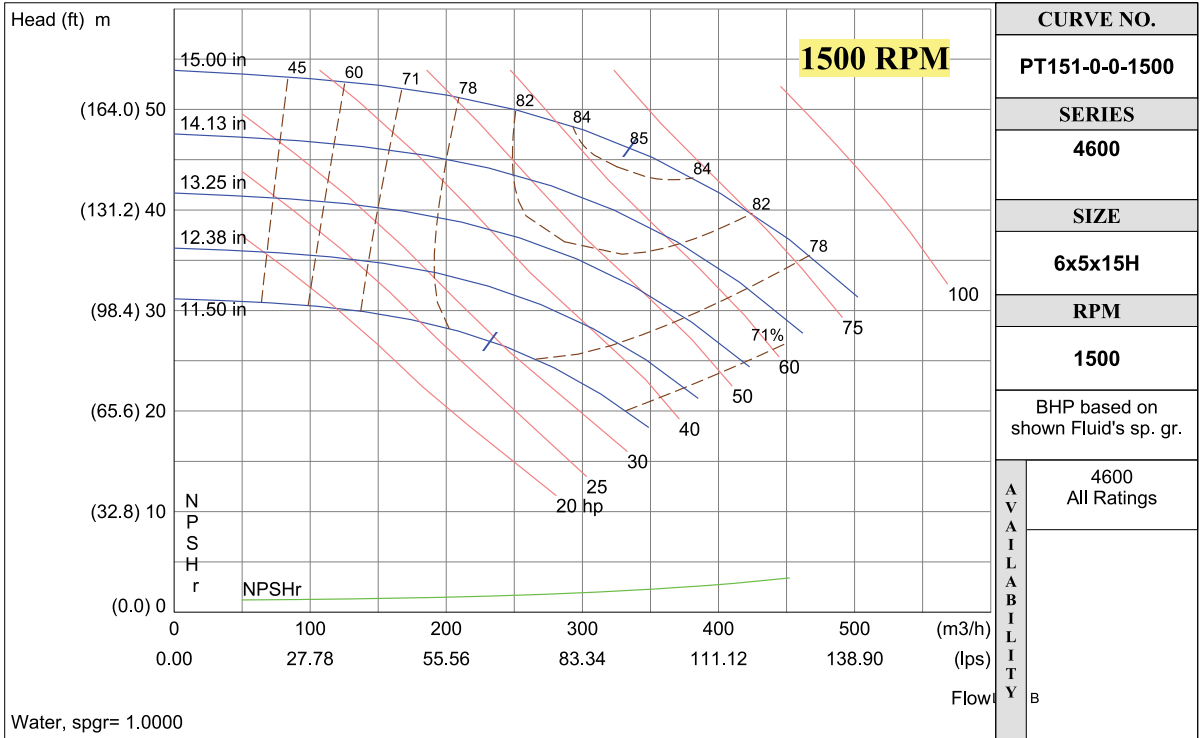

<b>CURVE NO.</b>	
PT151-0-0-1500	
<b>SERIES</b>	
4600	
<b>SIZE</b>	
6x5x15H	
<b>RPM</b>	
1500	
BHP based on shown Fluid's sp. gr.	
AVAILABILITY	4600 All Ratings

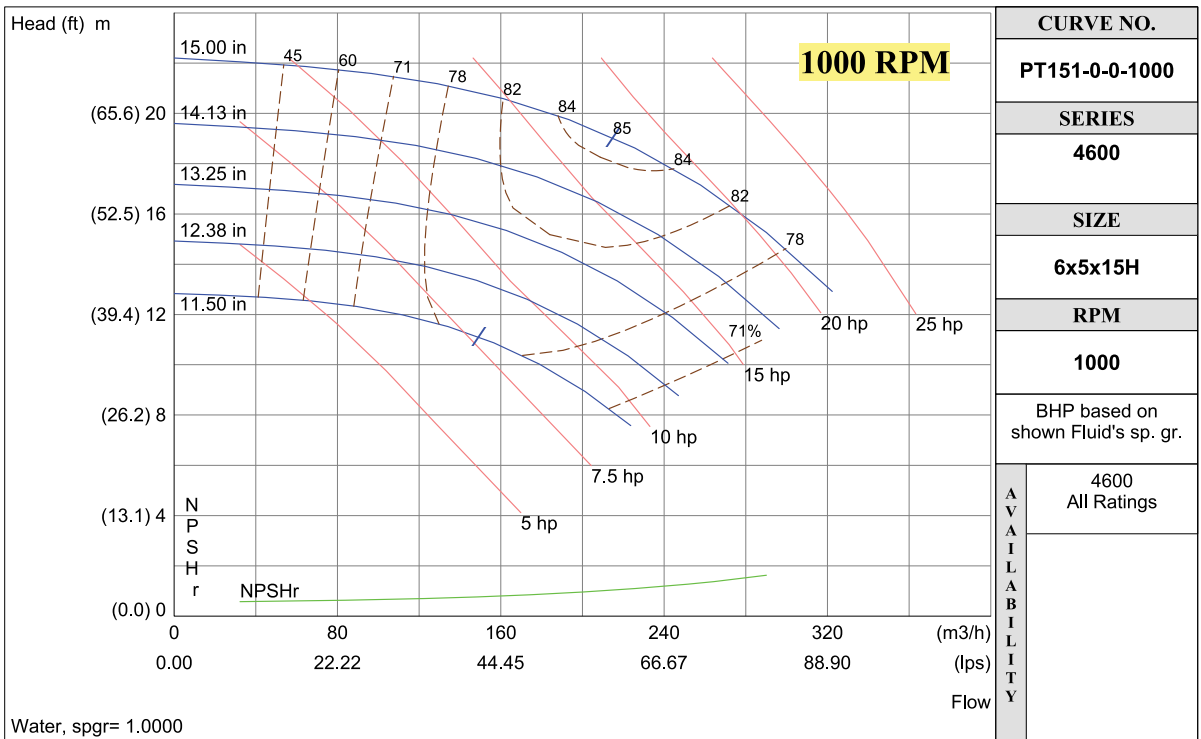

<b>CURVE NO.</b>	
PT151-0-0-1000	
<b>SERIES</b>	
4600	
<b>SIZE</b>	
6x5x15H	
<b>RPM</b>	
1000	
BHP based on shown Fluid's sp. gr.	
AVAILABILITY	4600 All Ratings

**S. A. Armstrong Limited**  
 23 Bertrand Avenue  
 Toronto, Ontario  
 Canada, M1L 2P3  
 T: (416) 755-2291  
 F (Main): (416) 759-9101

**Armstrong Pumps Inc.**  
 93 East Avenue  
 North Tonawanda, New York  
 U.S.A. 14120-6594  
 T: (716) 693-8813  
 F: (716) 693-8970

**Armstrong Holden Brooke Pullen**  
 Wenlock Way  
 Manchester  
 United Kingdom, M12 5JL  
 T: +44 (0) 161 223 2223  
 F: +44 (0) 161 220 9660



© S.A. Armstrong Limited 2006

For Armstrong locations worldwide, please visit [www.armstrongpumps.com](http://www.armstrongpumps.com)