

SUCTION GUIDES MODEL SG | SUBMITTAL

File No: 35-52IEC
 Date: AUGUST 12, 2024
 Supersedes: 35-52IEC
 Date: FEBRUARY 08, 2024

Job: _____ Representative: _____
 _____ Ordered by: _____ Date: _____
 Engineer: _____ Submitted by: _____ Date: _____
 Contractor: _____ Approved by: _____ Date: _____

MODEL NUMBER	CONNECTION SIZES		QUANTITY REQUIRED	IDENTIFICATION
	INLET FROM SYSTEM BSPT	OUTLET TO PUMP		
		<input type="checkbox"/> PN 16 <input type="checkbox"/> PN 25		

MATERIALS OF CONSTRUCTION

Body*: Cast iron
Strainer*: Stainless steel, 3 mm (0.125") perf.
Start-up strainer (remove after 1 week): Fine mesh
 galvanized steel
Guide vanes: Cast iron
Inlet gauge tapping: 1/4" NPT - plugged


* SG-2515, SG-42, SG-425 and SG-63 have Ductile Iron Body and Guide Vanes with 0.188" holes in strainer

MAXIMUM PUMP OPERATING CONDITIONS

Maximum pressure: 16 bar
Maximum temperature: 150°C


OPTIONS

PRESSURE TEMPERATURE LIMITS

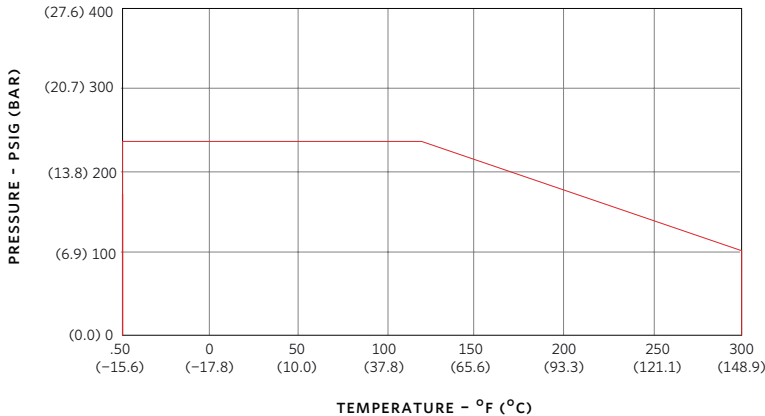

PRESSURE DROP - FT (M) OF WATER @ FLOW IN USGPM (L/S)

MODEL	VELOCITY - FT/S (M/S)						
	3 (0.91)	4 (1.22)	5 (1.52)	6 (1.83)	8 (2.44)	10 (3.05)	12 (3.66)
SG-22							
SG-252	0.11 (0.03)	0.20 (0.06)	0.32 (0.10)	0.43 (0.13)	0.80 (0.25)	1.28 (0.39)	1.72 (0.54)
SG-32	@ 32 (2.0)	@ 43 (2.7)	@ 54 (3.4)	@ 64 (4.0)	@ 86 (5.4)	@ 108 (6.8)	@ 128 (8.1)
SG-2525							
SG-325	0.18 (0.05)	0.32 (0.10)	0.50 (0.15)	0.72 (0.22)	1.28 (0.39)	2.00 (0.61)	2.88 (0.88)
	@ 45 (2.8)	@ 50 (3.2)	@ 75 (4.7)	@ 90 (5.7)	@ 120 (7.6)	@ 150 (9.5)	@ 180 (11.4)
SG-2515							
SG-33	0.20 (0.06)	0.35 (0.11)	0.55 (0.17)	0.80 (0.25)	1.42 (0.43)	2.20 (0.67)	3.15 (0.96)
SG-43	@ 70 (4.4)	@ 92 (5.8)	@ 115 (7.3)	@ 138 (8.7)	@ 1.42 (0.43)	@ 230 (14.5)	@ 276 (17.4)
SG-42							
SG-425							
SG-44	0.17 (0.05)	0.29 (0.09)	0.47 (0.14)	0.68 (0.21)	1.20 (0.37)	1.90 (0.58)	2.75 (0.84)
SG-54	@ 118 (7.4)	@ 155 (9.8)	@ 198 (12.5)	@ 238 (15.0)	@ 315 (19.9)	@ 396 (25.0)	@ 475 (30.0)
SG-64							
SG-55	0.23 (0.07)	0.41 (0.13)	0.67 (0.20)	0.95 (0.29)	1.70 (0.52)	2.65 (0.81)	3.80 (1.16)
SG-65	@ 187 (11.8)	@ 250 (15.8)	@ 315 (19.9)	@ 375 (23.7)	@ 500 (31.5)	@ 625 (39.4)	@ 750 (47.3)
SG-63							
SG-66	0.22 (0.07)	0.38 (0.12)	0.60 (0.18)	0.86 (0.26)	1.54 (0.47)	2.40 (0.73)	3.45 (1.05)
SG-86	@ 270 (17.0)	@ 360 (22.7)	@ 450 (28.4)	@ 540 (34.1)	@ 720 (45.4)	@ 900 (56.8)	@ 1080 (68.1)
SG-84							
SG-85	0.21 (0.06)	0.37 (0.11)	0.58 (0.18)	0.85 (0.26)	1.50 (0.46)	2.30 (0.70)	3.35 (1.02)
SG-88	@ 470 (29.7)	@ 625 (39.4)	@ 780 (49.2)	@ 940 (59.3)	@ 1250 (78.9)	@ 1550 (97.8)	@ 1870 (118.0)
SG-108							
SG-104							
SG-1010	0.26 (0.08)	0.46 (0.14)	0.73 (0.22)	1.03 (0.31)	1.85 (0.56)	2.92 (0.89)	4.20 (1.28)
SG-1210	@ 740 (46.7)	@ 980 (61.8)	@ 1230 (77.6)	@ 1480 (93.4)	@ 1960 (123.7)	@ 2450 (154.6)	@ 2940 (185.5)
SG-1212	0.25 (0.08)	0.44 (0.13)	0.72 (0.22)	1.02 (0.31)	1.81 (0.55)	2.80 (0.85)	4.00 (1.22)
SG-1412	@ 1080 (68.1)	@ 1400 (88.3)	@ 1750 (110.4)	@ 2100 (132.5)	@ 2800 (176.7)	@ 3500 (220.8)	@ 4200 (265.0)

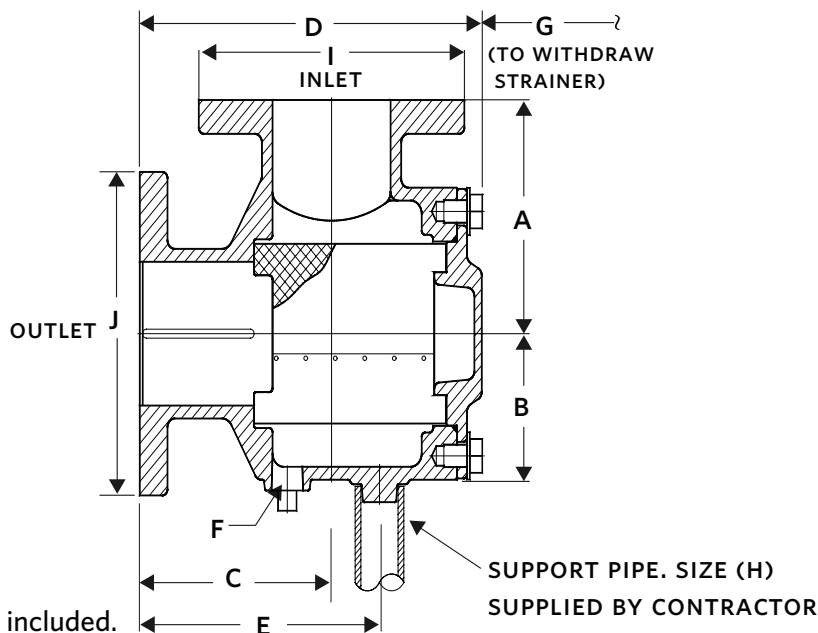

DIMENSIONAL DATA SG																
MODEL NUMBER	PART NUMBER	RATING	INLET	OUTLET	STRAINER FREE AREA	DIMENSIONS in mm (inches)										WEIGHT
					cm ² (in ²)	A	B	C	D	E	F	G	ØH	ØI	ØJ	
SG-2515	516860-534	PN 16	64 (2.50)	38 (1.50)	289 (44.83)	150 (5.92)	92 (3.63)	152 (6.00)	263 (10.34)	193 (7.60)	19 (0.75)	140 (5.50)	24 (0.95)	185 (7.28)	130 (5.12)	11.9 (26.31)
SG-22	516860-514	PN 16	51 (2.00)	51 (2.00)	205 (31.79)	114 (4.50)	78 (3.06)	114 (4.50)	212 (8.35)	145 (5.71)	13 (0.50)	121 (4.75)	24 (0.95)	152 (6.00)	152 (6.00)	11.8 (26.00)
SG-252	516860-515	PN 16	64 (2.50)	51 (2.00)	205 (31.79)	127 (5.00)	78 (3.06)	114 (4.50)	212 (8.35)	145 (5.71)	13 (0.50)	121 (4.75)	24 (0.95)	178 (7.00)	152 (6.00)	13.2 (29.00)
SG-32	516860-516	PN 16	77 (3.00)	51 (2.00)	205 (31.79)	140 (5.50)	78 (3.06)	114 (4.50)	212 (8.35)	145 (5.71)	13 (0.50)	121 (4.75)	24 (0.95)	198 (7.81)	152 (6.00)	14.1 (31.00)
SG-42	516860-535	PN 16	102 (4.00)	51 (2.00)	483 (74.91)	177 (6.96)	107 (4.20)	177 (6.96)	306 (12.04)	218 (8.59)	19 (0.75)	178 (7.00)	29 (1.13)	228 (8.98)	160 (6.30)	21.1 (46.69)
SG-2525	516860-517	PN 16	64 (2.50)	64 (2.50)	205 (31.79)	124 (4.90)	78 (3.06)	124 (4.90)	216 (8.50)	149 (5.86)	13 (0.50)	121 (4.75)	24 (0.94)	181 (7.12)	181 (7.12)	15.4 (34.00)
SG-325	516860-518	PN 16	77 (3.00)	64 (2.50)	205 (31.79)	140 (5.50)	78 (3.06)	124 (4.90)	216 (8.50)	149 (5.86)	13 (0.50)	121 (4.75)	24 (0.94)	198 (7.81)	181 (7.12)	15.8 (35.00)
SG-425	516860-536	PN 16	102 (4.00)	64 (2.50)	483 (74.91)	177 (6.96)	107 (4.20)	177 (6.96)	306 (12.04)	218 (8.59)	19 (0.75)	178 (7.00)	29 (1.13)	228 (8.98)	185 (7.28)	26.7 (58.94)
SG-33	516860-519	PN 16	77 (3.00)	77 (3.00)	289 (44.79)	137 (5.40)	92 (3.63)	137 (5.40)	247 (9.74)	178 (7.00)	19 (0.75)	140 (5.50)	24 (0.94)	198 (7.81)	198 (7.81)	20.4 (45.00)
SG-43	516860-520	PN 16	102 (4.00)	77 (3.00)	289 (44.79)	165 (6.50)	92 (3.63)	150 (5.90)	260 (10.24)	191 (7.50)	19 (0.75)	140 (5.50)	24 (0.94)	229 (9.00)	198 (7.81)	23.6 (52.00)
SG-63	516860-537	PN 16	152 (6.00)	77 (3.00)	895 (138.77)	216 (8.52)	145 (5.71)	240 (9.46)	405 (15.94)	296 (11.65)	25 (1.00)	178 (7.00)	44 (1.75)	282 (11.12)	208 (8.19)	48.7 (107.45)
SG-44	516860-521	PN 16	102 (4.00)	102 (4.00)	483 (74.91)	165 (6.50)	107 (4.20)	165 (6.50)	294 (11.59)	207 (8.13)	19 (0.75)	178 (7.00)	29 (1.13)	229 (9.00)	229 (9.00)	32.7 (72.00)
SG-54	516860-522	PN 16	127 (5.00)	102 (4.00)	483 (74.91)	189 (7.44)	107 (4.20)	165 (6.50)	294 (11.59)	207 (8.13)	19 (0.75)	178 (7.00)	29 (1.13)	254 (10.00)	229 (9.00)	35.8 (79.00)
SG-64	516860-523	PN 16	152 (6.00)	102 (4.00)	483 (74.91)	204 (8.03)	107 (4.20)	191 (7.50)	320 (12.59)	232 (9.13)	19 (0.75)	178 (7.00)	29 (1.13)	279 (11.00)	229 (9.00)	39.5 (87.00)
SG-55	516860-524	PN 16	127 (5.00)	127 (5.00)	663 (102.84)	190 (7.47)	122 (4.81)	190 (7.47)	336 (13.23)	241 (9.47)	25 (1.00)	203 (8.00)	29 (1.13)	254 (10.00)	254 (10.00)	44.9 (99.00)
SG-65	516860-525	PN 16	152 (6.00)	127 (5.00)	663 (102.84)	203 (8.00)	122 (4.81)	190 (7.47)	336 (13.23)	241 (9.47)	25 (1.00)	203 (8.00)	29 (1.13)	283 (11.15)	254 (10.00)	46.7 (103.00)
SG-66	516860-526	PN 16	152 (6.00)	152 (6.00)	895 (138.77)	203 (8.00)	145 (5.71)	203 (8.00)	368 (14.48)	259 (10.19)	25 (1.00)	235 (9.25)	44 (1.75)	283 (11.15)	283 (11.15)	64 (141.00)
SG-86	516860-527	PN 16	203 (8.00)	152 (6.00)	895 (138.77)	229 (9.00)	145 (5.71)	254 (10.00)	419 (16.48)	310 (12.19)	25 (1.00)	235 (9.25)	44 (1.75)	343 (13.50)	283 (11.15)	81.6 (180.00)
SG-84	516880-560	PN 16	203 (8.00)	102 (4.00)	1652 (256.23)	254 (10.00)	178 (6.99)	301 (11.87)	513 (20.21)	381 (15.02)	25 (1.00)	311 (12.25)	44 (1.75)	343 (13.50)	229 (9.00)	81.9 (180.56)
SG-85	516880-562	PN 16	203 (8.00)	127 (5.00)	1652 (256.23)	254 (10.00)	178 (6.99)	301 (11.87)	513 (20.21)	381 (15.02)	25 (1.00)	311 (12.25)	44 (1.75)	343 (13.50)	254 (10.00)	83.4 (183.87)
SG-88	516860-528	PN 16	203 (8.00)	203 (8.00)	1653 (256.23)	227 (8.93)	178 (6.99)	261 (10.28)	473 (18.62)	341 (13.43)	25 (1.00)	311 (12.25)	44 (1.75)	343 (13.50)	343 (13.50)	96.6 (213.00)
SG-108	516860-529	PN 16	254 (10.0)	203 (8.00)	1653 (256.23)	278 (10.93)	178 (6.99)	325 (12.78)	536 (21.12)	405 (15.93)	25 (1.00)	311 (12.25)	44 (1.75)	406 (16.00)	343 (13.50)	108.4 (239.00)
SG-104	516880-564	PN 16	254 (10.0)	102 (4.00)	2477 (384.01)	292 (11.50)	207 (8.13)	363 (14.29)	623 (24.54)	466 (18.35)	25 (1.00)	386 (15.21)	44 (1.75)	406 (16.00)	229 (9.00)	128.2 (282.63)
SG-1010	516860-530	PN 16	254 (10.0)	254 (10.0)	2477 (384.01)	290 (11.43)	207 (8.13)	323 (12.72)	583 (22.97)	426 (16.78)	25 (1.00)	381 (15.00)	44 (1.75)	406 (16.00)	406 (16.00)	158.3 (349.00)
SG-1210	516860-531	PN 16	305 (12.0)	254 (10.0)	2477 (384.01)	330 (13.00)	207 (8.13)	399 (15.72)	660 (25.97)	502 (19.78)	25 (1.00)	381 (15.00)	44 (1.75)	483 (19.00)	406 (16.00)	176.9 (390.00)
SG-1212	516860-532	PN 16	305 (12.0)	305 (12.0)	4313 (668.51)	389 (15.30)	273 (10.76)	360 (14.18)	698 (27.47)	519 (20.45)	25 (1.00)	483 (19.00)	44 (1.75)	483 (19.00)	483 (19.00)	290.8 (641.00)
SG-1412	516860-533	PN 16	356 (14.0)	305 (12.0)	4313 (668.51)	406 (16.00)	273 (10.76)	360 (14.18)	698 (27.47)	519 (20.45)	25 (1.00)	483 (19.00)	44 (1.75)	533 (21.00)	483 (19.00)	289.0 (637.00)

- Dimensions and weights are for reference only. Dimensions are mm (inches) and weights are kg (lbs).
- Tolerance of ±3 mm(±0.125") should be used
- For exact installation data, please write factory for certified dimensions

TORONTO

23 BERTRAND AVENUE,
TORONTO, ONTARIO,
CANADA, M1L 2P3
+1 416 755 2291

BUFFALO

93 EAST AVENUE, NORTH
TONAWANDA, NEW YORK,
U.S.A., 14120-6594
+1 716 693 8813

DROITWICH SPA

POINTON WAY, STONEBRIDGE CROSS
BUSINESS PARK, DROITWICH SPA,
WORCESTERSHIRE,
UNITED KINGDOM, WR9 0LW
+44 121 550 5333

MANCHESTER

WOLVERTON STREET, MANCHESTER
UNITED KINGDOM, M11 2ET
+44 161 223 2223

BANGALORE

#18, LEWIS WORKSPACE, 3RD FLOOR,
OFF MILLERS - NANDIDURGA ROAD,
JAYAMAHAL CBD, BENSON TOWN,
BANGALORE, INDIA 560 046
+91 80 4906 3555

SHANGHAI

UNIT 903, 888 NORTH SICHUAN RD.
HONGKOU DISTRICT, SHANGHAI
CHINA, 200085
+86 21 5237 0909

BEIJING

ROOM 1612, NANYIN BUILDING NO.2
NORTH EAST THRID RING ROAD
CHAOYANG DISTRICT, BEIJING,
CHINA 100027
+86 21 5237 0909

SÃO PAULO

RUA JOSÉ SEMIÃO RODRIGUES
AGOSTINHO, 1370 GALPÃO 6 EMBU
DAS ARTES, SAO PAULO, BRAZIL
+55 11 4785 1330

LYON

93 RUE DE LA VILLETTE
LYON, 69003 FRANCE
+33 4 20 10 26 21

DUBAI

JAFZA VIEW 19, OFFICE 402
P.O.BOX 18226 JAFZA,
DUBAI - UNITED ARAB EMIRATES
+971 4 887 6775

JIMBOLIA

STR CALEA MOTILOR NR. 2C
JIMBOLIA 305400, JUD.TIMIS
ROMANIA
+40 256 360 030

FRANKFURT

WESTERBACHSTRASSE 32,
D-61476 KRONBERG IM TAUNUS
GERMANY
+49 6173 999 77 55

ARMSTRONG FLUID TECHNOLOGY®
ESTABLISHED 1934

ARMSTRONGFLUIDTECHNOLOGY.COM